



Installation Example

Concrete Class B 125 - C 250

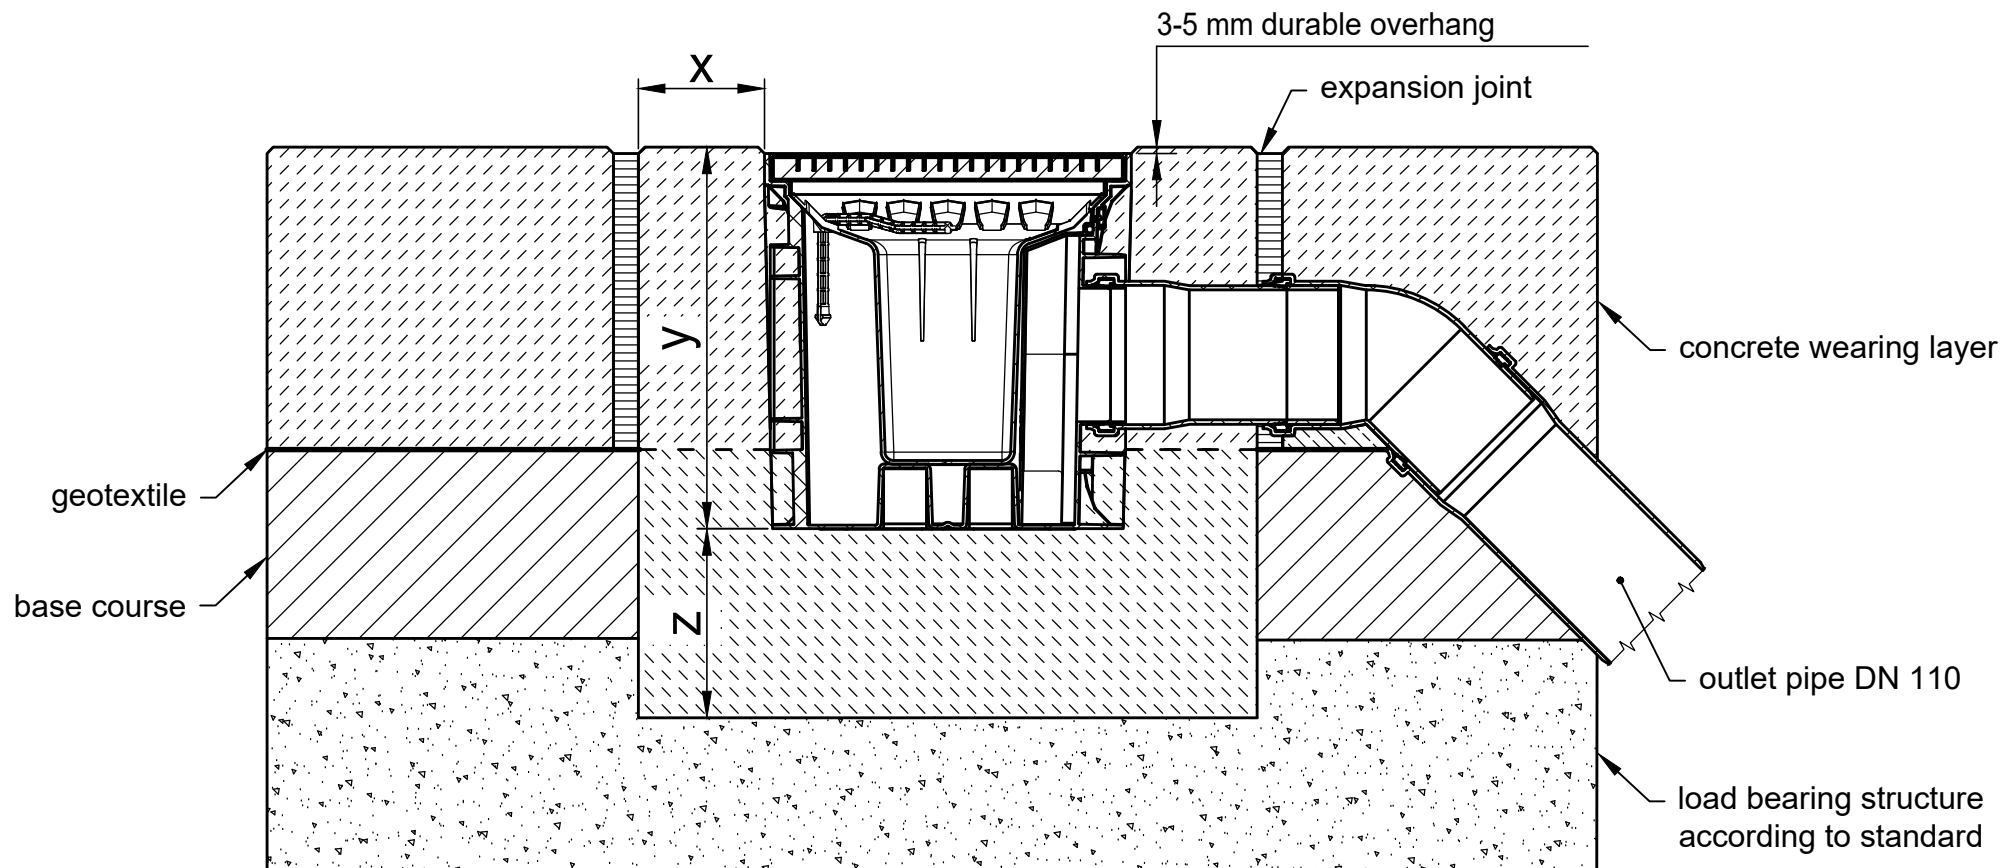

Attention: The foul air trap loses its function when connected above the ground!

* y = Channel height plus camber

Category according to EN 1433 / DIN 19580		A 15	B 125	C 250	D 400**	E 600	F 900	Applying to following systems:				
Foundation: width x / height y / thickness z (in cm)			10 / * / 10	10 / * / 15				RECYFIX POINT 30/30				
EN 206-1 / DIN 1045-2	quality of concrete stretcher		C30/37 XF4,XM1	C30/37 XF4,XM1								
The named concrete quality is a minimum quality	without danger of frost on the lateral support		C25/30 X0	C25/30 X0								
	with danger of frost on the lateral support		C25/30 XF3	C25/30 XF3								
The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at www.hauraton.com In building construction is a sealing layer below the channels necessary. The installation example represents a proven recommendation from HAURATON. The final responsibility for the execution lies with the planner in charge. Specific conditions of the project must be taken into account.				Date: 28.02.2024		Our general installation instructions apply.		Format DIN	A4	 Unit 4, Frenchs Avenue LU6 1BH Dunstable / Bedfordshire United Kingdom Tel. +44 1582 501380 TS-UK@hauraton.com		
								scale	1:6			
				0000127210_BRITISH.dwg				13			EBBw	
				RF-POINT 30/30 Einbaubeispiel Klasse C 250 in Beton, KG Anschluß 45°								