



Installation Example
Concrete Class E 600 - F 900

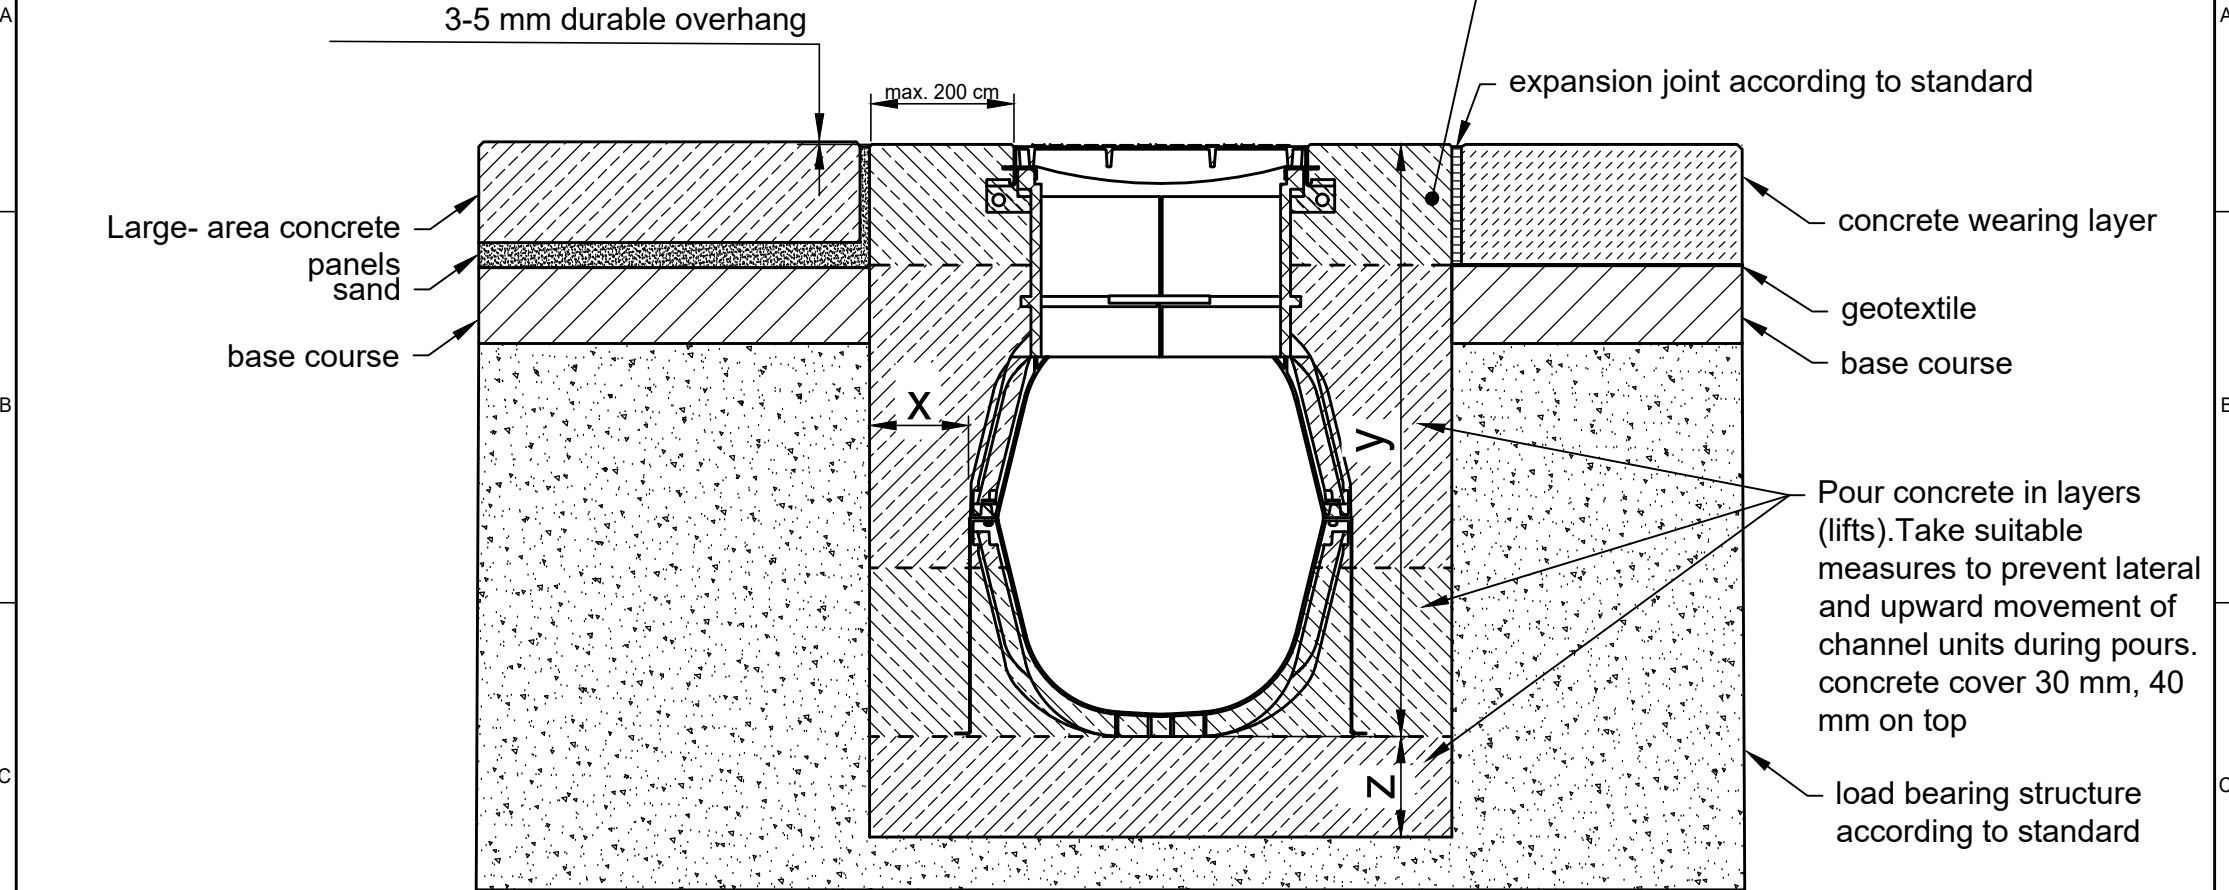

* y = Component height

reinforcement see reinforcement drawing 0000122643

Category according to EN 1433 / DIN 19580		A 15	B 125	C 250	D 400**	E 600**	F 900**	Applying to following systems:		
Foundation: width x / height y / thickness z (in cm)						20 / * / 20	20 / * / 20	RECYFIX HICAP 10300 Access Element		
EN 206-1 / DIN 1045-2	quality of concrete stretcher					C35/45 XD3, XF4, XM2	C35/45 XD3, XF4, XM2			
The named concrete quality is a minimum quality	without danger of frost on the lateral support					C35/45 XD3, XF4, XM2	C35/45 XD3, XF4, XM2			
	with danger of frost on the lateral support					C35/45 XD3, XF4, XM2	C35/45 XD3, XF4, XM2			
<p>The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at www.hauraton.com In building construction is a sealing layer below the channels necessary.</p> <p>The installation example represents a proven recommendation of the HAURATON company. The final responsibility for the design of e.g. expansion joints or the suitable load transfer is with the responsible planner, the responsibility for the execution is with the contractor.</p> <p>** Installation situations of drainage systems with high dynamic loads (e.g. airports, motorways and manoeuvring areas of buses, lorries and forklifts, etc.) are not sufficiently considered in DIN EN 1433. Please contact us for such applications to work out project-specific solutions.</p>				Date: 02.07.2025		Our general installation instructions apply.		Format DIN	A4	 <div>Unit 4, Frenchs Avenue LU6 1BH Dunstable / Bedfordshire United Kingdom</div> <div>Tel. +44 1582 501380 TS-UK@hauraton.com</div>
								scale	1:15	
				0000104756_BRITISH.dwg		14	EBBw			
				RF HICAP 680 Revi Typ 10000 Kl. F900						