

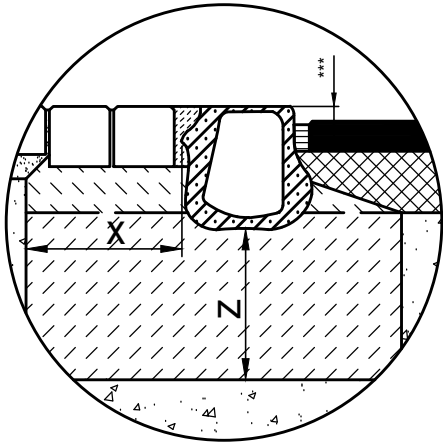


Installation Example
in asphalted areas Class A 15 - D 400

Dynamic shearing forces on pavement / kerb must not affect
the channel wall due to the friction connection with the haunching.

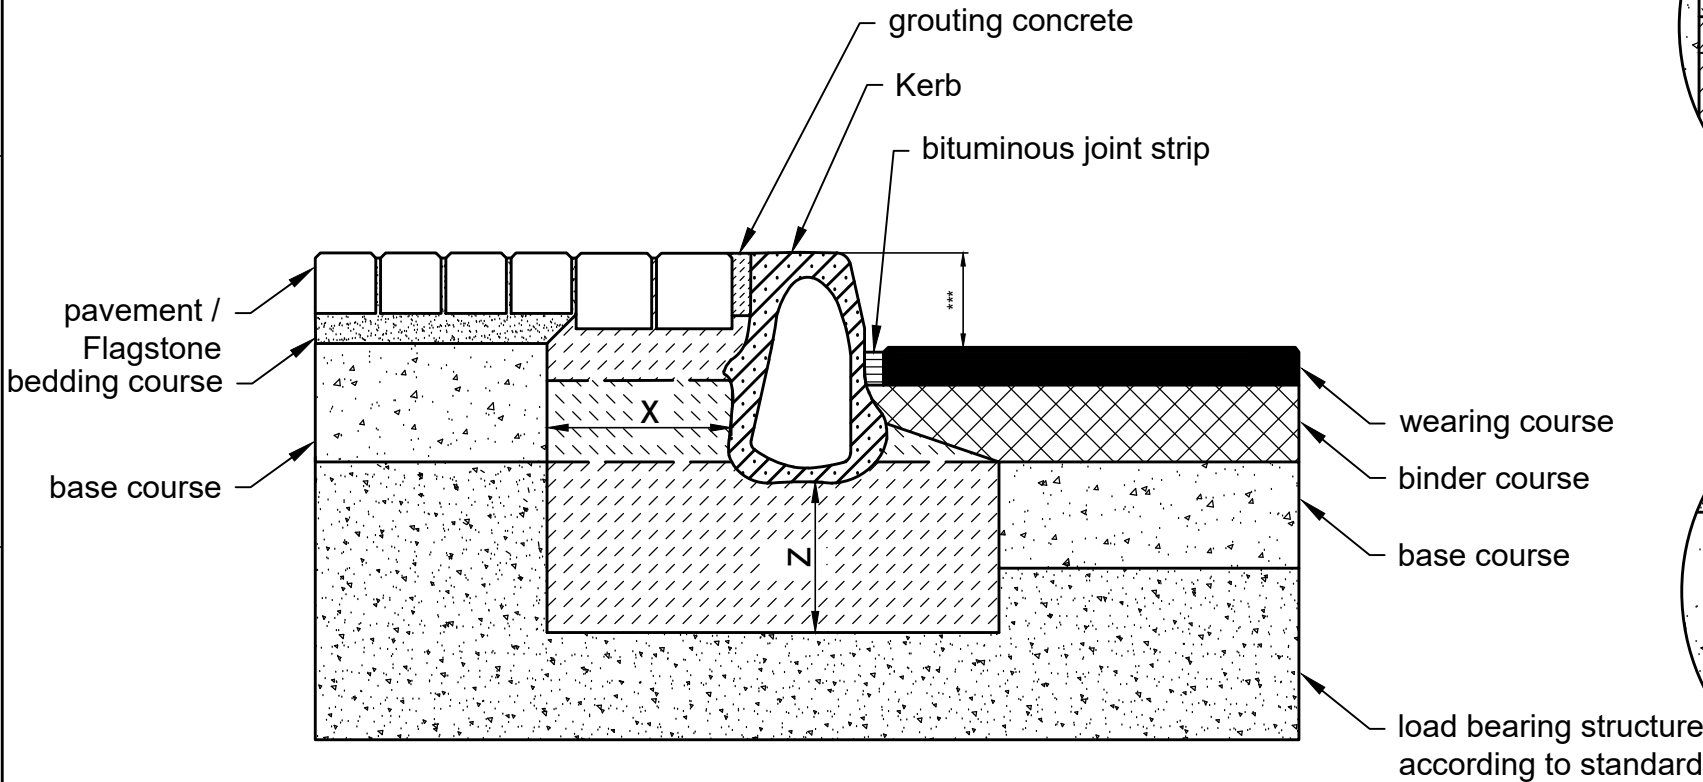


as lowered Kerb

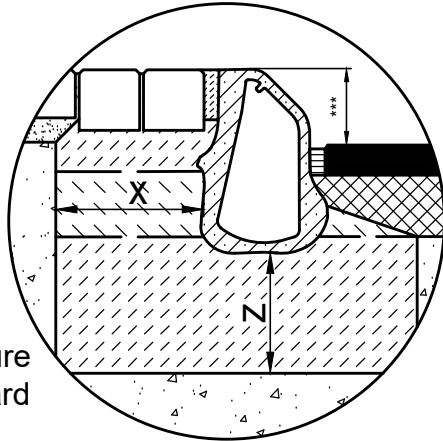

as beveled Kerb

*** 75 - 125 mm as Kerb
100 - 125 mm as lowered Kerb
75 - 100 mm as beveled Kerb

Category according to EN 1433 / DIN 19580		A 15	B 125	C 250	D 400**	E 600**	F 900**	Applying to following systems:		
Foundation: width x / height y / thickness z (in cm)		15 / * / 15	15 / * / 15	20 / * / 20	20 / * / 20			KERBFIX		
EN 206-1 / DIN 1045-2	quality of concrete stretcher									
	without danger of frost on the lateral support	C25/30 X0	C25/30 X0	C25/30 X0	C25/30 X0					
	with danger of frost on the lateral support	C25/30 XF3	C25/30 XF3	C25/30 XF3	C25/30 XF3					
<p>The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at www.hauraton.com In building construction is a sealing layer below the channels necessary.</p> <p>The installation example represents a proven recommendation from HAURATON. The final responsibility for the execution lies with the planner in charge. Specific conditions of the project must be taken into account.</p> <p>** Installation situations of drainage systems with high dynamic loads (e.g. airports, motorways and manoeuvring areas of buses, lorries and forklifts, etc.) are not sufficiently considered in DIN EN 1433. Please contact us for such applications to work out project-specific solutions.</p>				Date: 12.06.2024		Our general installation instructions apply.		Format DIN	A4	 Unit 4, Frenchs Avenue LU6 1BH Dunstable / Bedfordshire United Kingdom Tel. +44 1582 501380 TS-UK@hauraton.com
								scale	1:10	
				0000143299_BRITISH.dwg		9	EBBw			
				KERBFIX Einbaubeispiel Klasse D 400 in Asphalt						